




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 4 : A47G 5/02, A47H 3/00	A1	(11) International Publication Number: WO 85/ 02760 (43) International Publication Date: 4 July 1985 (04.07.85)
(21) International Application Number: PCT/US84/02063 (22) International Filing Date: 14 December 1984 (14.12.84) (31) Priority Application Number: 565,709 (32) Priority Date: 27 December 1983 (27.12.83) (33) Priority Country: US (71) Applicant: GENERAL CLUTCH CORP. [US/US]; 1501 Broadway, New York, NY 10036 (US). (72) Inventors: RUDE, Edward, T. ; 92 Woodside Circle, Fairfield, CT 06432 (US). NISENSEN, Jules ; 143 Hoyt Street, Stamford, CT 06905 (US). WAINE, Mar- tin ; 29 Coventry Lane, Riverside, CT 06878 (US). (74) Agents: COOPER, Barry, A. et al.; Gottlieb, Rackman & Reisman, 1430 Broadway, New York, NY 10018 (US).		(81) Designated States: AT (European patent), AU, BE (Eu- ropean patent), BR, CH (European patent), DE (Eu- ropean patent), DK, FI, FR (European patent), GB (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent). Published With international search report.

(54) Title: HEADRAIL HARDWARE FOR HANGING WINDOW COVERINGS

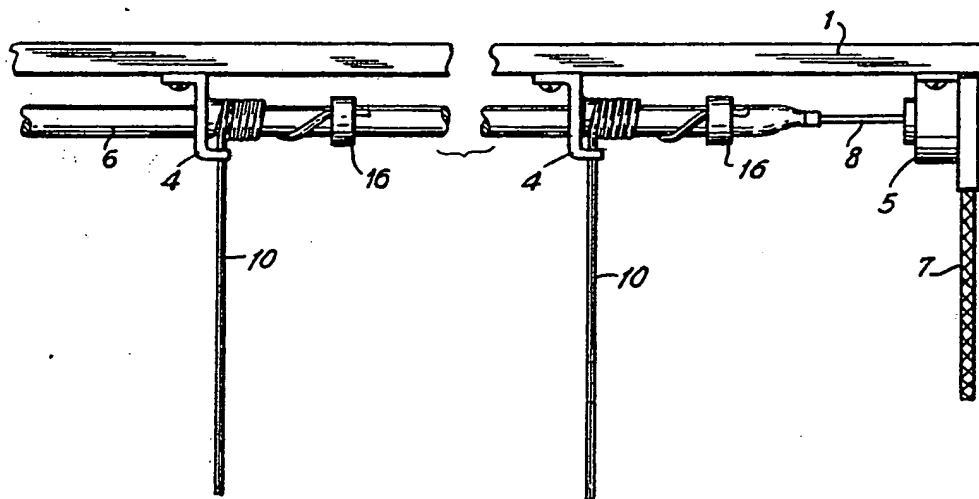

(57) Abstract

A capstan (6) based system for pulling and accumulating the pull-cords (10) used to lift hanging window coverings (2) from their bottoms. A cylindrical capstan (6) is supported in bearings so that it is free to rotate and move axially. A splined connection to a holding device permits controlled rotation and locking of the capstan (6). Each of one or more cords (10) is attached to the capstan (6) by means of a clip (16) which can be easily positioned to adjust the position and length of its cord. As the capstan (6) is turned, the cords (10) wind onto the capstan (6) in a single layer due to the camming action of a specially configured camming surface (15). The capstan (6) begins to move laterally when sufficient friction has developed between the capstan (6) and the cord (10) which has been wound onto it. This provides space for the cord to wind onto the capstan (6) in a single layer. During unwinding of the cord (10), a guiding surface (12), over which the cord (10) moves, pulls the capstan (6) back toward its original position. The camming (15) and guiding surface (12) can be made symmetric so that bi-directional operation of the system is possible.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

- 1 -

5

DescriptionHEADRAIL HARDWARE FOR HANGING WINDOW COVERINGS

10 This invention relates to the operating hardware for
headrails used with hanging window coverings made to be
raised and lowered from the bottom. Such coverings, of
which woven wood blinds and venetian blinds are examples,
are usually lifted from the bottom of the blind by cords
15 which pass over pulleys and on which the user pulls di-
rectly, without any mechanical advantage. When such a blind
is fully extended, the entire weight of the blind is sup-
ported by the attachment to the headrail, the structural
member at the top of the blind by which the blind is mount-
20 ed. The lift cords, used to raise the blind, are slack at
full extension. As the blind is raised, beginning with the
bottom, an increasing portion of the blind's weight is sup-
ported by the lift cords. When the blind is fully raised,
all of its weight, except that near the headrail, is suppor-
25 ted by the lift cords. Since these blinds often weigh ten
pounds, and sometimes as much as thirty pounds, the force
necessary to raise them can be more than a small person or a
child can manage. Even for one strong enough to raise the
blinds, it can be quite uncomfortable to the hands.

30 In addition, the cord locking mechanism used to main-
tain the blinds in an elevated position requires that the
operator pull the cords to one side and release them in
order to engage the lock. This process sometimes results in
only one of the several cords being engaged so that the
35 blind falls lower on one side and hangs unevenly. To lower
the blind the user must first lift the blind slightly to

- 2 -

release the cord lock and then, while holding the cords in the correct position so as not to re-engage the lock, carefully allow the cords to move up. This requires that the user support the weight of the blind while it is being lowered. If the cords are released too rapidly, the blind can fall noisily and unevenly to the bottom of the window. Sometimes, while a blind is being lowered, one of the cords will contact the locking mechanism which will catch either that cord alone, causing the blind to lower on one side only, or it will catch all of the cords causing the blind to be latched in that position and no longer free to be lowered.

Also disadvantageous is the fact that, when the blinds are fully raised, the cords often reach the floor where they lie in an unattractive and inconvenient fashion. A further disadvantage to the present day hardware is that the cords are quickly worn by the cord locking mechanisms which hold the blinds at elevated positions. Cord wear is caused mainly because the cord locking mechanism, which performs its function by pinching the cords between a sharp gripper piece and an anvil, often at the same spot on the cords, results in badly worn spots or broken cords. Furthermore, the cords become soiled from the user's hands and, since the operator pulls on the same cords which lift the blind, the entire blind must be restrung when the cords become dirty. Restringing usually requires the services of a professional.

The installation of woven wood blinds and other types of blinds which are lifted from the bottom by two or more cords is complicated by the requirement that all the cords be the same length if the blind is to hang properly. In present day hardware the installer must adjust the length of each cord at the knot which terminates that cord to an attachment near the bottom of the blind. The cords lie along the inside surface of the blind, facing the window, so that the adjustment is further complicated in that they are

- 3 -

hard to reach and also in that the blind is not hanging freely while the adjustment is being made. It is, therefore, not uncommon for the adjustment to be made several times before the blind is finally hung correctly. More than one adjustment will often be necessary because the cords stretch under load.

A wide variety of patents have been granted to those who have, over a period of a century, attempted to provide satisfactory solutions to some of the difficulties mentioned above. Among these are many which use some type of roll-up mechanism to contain the lifting cords within the headrail itself. Devices that contain the cords within the headrail ordinarily employ some sort of capstan onto which the cords (or, in older blinds, tapes) are wound as the blind is raised. Usually the capstan is rotated by a separate cord, often in the form of a loop which rides over a pulley. This pulley is then connected to the capstan so that pulling on one side or the other of the cord loop rotates the capstan, raising or lowering the blind.

The capstan approach in headrail design has the advantage that the lift cords suffer much less wear, abrasion, and soiling than in presently utilized designs. No cord lock is used, and the operator handles only the cord loop, not the lift cords. The cord loop is easily removable for cleaning or replacement. A holding device, operating on the capstan rather than on the lift cords, is used to maintain the position of the capstan while the blind is elevated.

Designs incorporating capstans require some mechanism to cause the capstan to traverse as the blind is raised or lowered so that the lift cords will wind in a closely spaced, single layer onto the capstan. Also, if the lift cords are allowed to wind one layer on another, then the mechanical advantage of the lift system decreases as the diameter of the accumulated, wound cord spool increases. Since this decrease in mechanical advantage accompanies an increase in

- 4 -

supported weight and, therefore, an increase in the pull necessary to further raise the blind, this arrangement is not desirable. If one, but not all, of the cords is allowed to overwind any of the previously wound cord, then the overwinding cord will raise its side of the blind at a greater rate than the cords which do not overwind because the overwinding cord will be accumulated onto a surface with a larger diameter. If the close spacing is not maintained, then additional capstan length will be required to lift the blind. Prior art designs have included gear racks and lead screws to coordinate the motion of the capstan with the winding of the lift cords so that a closely spaced single layer is achieved.

It is an object of the present invention to provide a lifting mechanism which overcomes the above-mentioned difficulties in design, installation, and operation.

In particular, it is an object of the present invention to provide a lifting system with mechanical advantage whose lift cords can be kept within the headrail and whose headrail will, nevertheless, be small in size and require fewer parts than prior art systems.

It is a further object of this invention to provide a lifting system whose lift cords can easily be adjusted to the correct length either at the time of installation or at any time thereafter when there is need to do so.

It is a further object of the present invention to provide a lifting system in which the cords suffer minimal wear and do not become easily soiled by frequent contact with the hands of the user, and in which the cords can easily be cleaned or replaced and adjusted to the proper length.

It is a further object of the present invention to provide a lifting system operated by a separate loop of cord or bead chain which can be easily replaced when it is soiled without the necessity of restringing the entire blind.

- 5 -

To these ends the present invention provides a capstan onto which the lift cords wind as well as a holding device which, in the preferred embodiment, is bi-directional, to control raising and lowering of the blind. This allows the lift cords to be separate from the operating cord which can, then, be easily removed for cleaning or replacement. Novel cord grips are used which allow extremely simple installation and adjustment of the lift cords. As the operating cord is pulled the holding device, or clutch, is released and the capstan is rotated, winding the lift cords onto the surface of the capstan. Each lift cord, as it winds onto the capstan, contacts a stationary camming surface resulting in a lateral force on the lift cord which deflects it away from the camming surface. When there is sufficient friction between the lift cord and the capstan, this deflection of the cord will cause the capstan to move laterally, providing space for the cord to continue to wind onto the capstan in a single layer. Without this camming action to move the capstan, the cord would eventually be forced into a multilayered wind. Multilayer winding has the disadvantages previously discussed. The camming surface can be shaped so that, regardless of the direction in which the cord is wound onto the capstan, the deflection of the cord will be in the same direction. Making the system bi-directional in this fashion eliminates the need for a stop at the full extension of the blind. If the system cannot properly handle cord for either direction of wind, then a stop must be included to prevent operation in the wrong direction.

Further objects, features and advantages of our invention will become apparent upon consideration of the following detailed description in conjunction with the drawings, in which:

FIG. 1 is a side elevation view of an illustrative embodiment of the lifting mechanism of the invention;

- 6 -

FIG. 2 is an end view of a woven wood blind used with the lifting mechanism of FIG. 1;

5 FIG. 3 is an end view of a different blind which rolls up;

FIG. 4 shows the bearing, bracket, and cord guide assembly of the lifting mechanism;

10 FIG. 5 shows the spline joint between the capstan and the clutch shaft of the lifting mechanism;

FIG. 6 shows a cord grip; and

15 FIGS. 7A through 7H are a sequence of views of the illustrative embodiment of the invention in various stages of its operation (with bracket 4 of FIG. 7B being shown in section).

Two examples of window coverings which can use the present invention advantageously are depicted, but others will be obvious to those skilled in the art. FIG. 2 shows a Roman fold blind, and FIG. 3 a roll-up configuration, both
20 of which can use the lift system of the invention.

The general organization of the system can be seen in FIG. 1. The hardware is mounted to headrail 1 which is, ordinarily, made of wood but which could as well be metal or plastic. Blind 2 and valence 3 (FIGS. 2 and 3) are mounted
25 to the headrail. Installation is usually done by attaching the headrail to brackets or to the ceiling. The hardware which is mounted to the headrail consists of brackets 4, shown in FIGS. 1 and 4, along with clutch 5 shown in FIG. 1. The preferred embodiment utilizes two or more brackets
30 although a single bracket could be used in some lifting configurations. In the preferred embodiment, bracket 4, shown separately in FIG. 4, is a molded plastic part having features as follows: mounting flange 11, cord guide 12, capstan bearing 13 with opening 14, and camming surface 15.

35 The holding device in the preferred embodiment, clutch 5, is of the type disclosed in U. S. Pat. No. 4,372,432. It permits rotation when cord loop 7 is moved, but is locked

- 7 -

when the cord is released. Output shaft 8 transmits the motion of clutch 5 to capstan 6. Bearing 13 of bracket 4 supports capstan 6 while permitting it to rotate freely. The upper end of each lift cord 10 is positioned on capstan 6 by a clip 16, shown separately in FIG. 6, and in position on the capstan in FIG. 1. Referring to FIG. 5, opening 9 in one end of capstan 6 is so formed as to slide easily over output shaft 8 producing, thereby, a spline connection between the two pieces that permits torque to be transmitted between them while still allowing relatively free lateral movement of capstan 6. Other types of holding devices can be used in place of the one in the preferred embodiment, however, provisions for back-locking and for a stop at the bottom may be necessary if the device is uni-directional.

FIGS. 7A through 7H depict various stages of the system's operation in sequence. The blind is raised and lowered by pulling on one side or the other of cord loop 7. As capstan 6 rotates, lift cords 10 are wound around it, raising the blind from the bottom. After a few turns of cord have been wound onto capstan 6, some of the blind's weight is being supported by the lift cords and the last turns of cord tighten on the capstan. Bracket 4 has an important function in addition to that of supporting capstan 6. As shown in FIG. 4, camming surface 15 is slanted so that a lateral force is exerted on the respective cord as it is wound onto the capstan. The lateral force, due to the action of camming surface 15 on the cord as it is wound onto capstan 6 in the direction of arrow 19 of FIG. 7A, then causes capstan 6 to move as indicated by arrow 17 in FIG. 7A. Space is provided in this way for additional cord to be wound onto the capstan. During lowering of the blind, as cord is being unwound from capstan 6 which now moves in the direction of arrow 20 of FIG. 7B, the cord bends about cord guide 12 exerting, thereby, a force in the opposite direction on the capstan, moving the capstan as indicated by

- 8 -

arrow 18 in FIG. 7B. FIG. 7C shows the lift cord almost fully unwound from the capstan. FIG. 7D shows the cord fully unwound as rotation continues in the same direction. FIG. 7E shows the cord starting to wind in the other direction onto the capstan. FIG. 7F shows one turn wrapped onto the capstan in the new direction, and FIG. 7G shows three turns on the capstan. At some point sufficient friction will have developed between the cord and the capstan so that camming action will begin as shown in FIG. 7H. This causes the movement of capstan 6 in the direction of arrow 17 of FIG. 7H. Camming surface 15 is symmetric with respect to the direction of rotation of the capstan tube so that the capstan will wind cord properly for either direction of rotation. The requirement for a stop at the full extension of the blind is eliminated by this symmetry. If a stop were to be used, then it would have to be incorporated into the capstan and be properly positioned with respect to the remainder of the hardware. This cumbersome positioning requirement is eliminated by the use of the bi-directional system of the preferred embodiment of our invention.

The tension in lift cords 10 is greatest where they first contact the capstan and it decreases in the direction of the clip due to the friction between the cords and the tube. Near the clip the tension remains quite low, even when the cords are fully wound onto the capstan and the entire weight of the blind is being supported by the cords. This permits the clips to hold the cords with a rather small gripping force. Adjustment of the individual lift cords is performed while the blind is fully extended and there is no tension on the lift cords. The adjustment is accomplished by sliding the appropriate clip 16 on the capstan. Assembly of the headrail system is greatly simplified by the use of the clips. Prior art attachment methods required drilling holes in the capstan at predetermined locations which

- 9 -

requires much more careful planning and layout. Adjustments in the lengths of individual lift cords are much more difficult to make if the cords are attached to the capstan through predrilled holes.

Wider blinds may require more than two lift cords in which case an additional bracket with cord guide and clip would be provided for each additional lift cord. As many lift cords can be used as are required to properly support the blind.

A Ratchet mechanism, gear reduction device, or frictional brake can be used as the holding device. Any uni-directional holding device will operate the mechanism. However, a stop will then be required at the full extension of the blind to prevent the lift cords from being fully unwound and then rewound onto the capstan in the opposite direction, since a uni-directional holding device will not maintain the position of the blind when the operating cord is no longer being pulled if the cords are wound in the wrong direction on the capstan. A stop which limits the capstan to that rotation required to fully extend the blind solves the problem. The addition of a stop requires additional parts, and any stop mechanism must be adjusted to operate at just the position corresponding to the full extension of the blind. The use of a bi-directional holding device, such as one of the type described in United States Patent No. 4,372,432, eliminates the need for a stop since the blind can be held in position no matter which direction the cords are wound onto the capstan.

The lift system described above has application also in situations where no lifting is required. The system could be used in any circumstance in which motion is to be produced by the winding of a cord, rope, or other flexible tension member, and where at least some amount of tension will be maintained at all times.

- 10 -

Although the invention has been described with reference to particular embodiments, it is to be understood that
5 these embodiments are merely illustrative of the application of the principles of the invention. Numerous modifications may be made therein and other arrangements may be devised without departing from the spirit and scope of the invention.

- 11 -

Claims

5

1. A lifting mechanism comprising a cylinder; bracket means to support said cylinder; rotation means; said cylinder being slideably connected to said rotation means to allow torque to be transmitted between said rotation means and said cylinder while still permitting lateral movement of said cylinder relative to said rotation means; a camming surface; a lift cord attached to said cylinder in relation to said camming surface such that rotation of said cylinder so as to wrap said lift cord around said cylinder causes said lift cord to bear against said camming surface to cause said cylinder to move in a first lateral direction; and a guiding surface disposed so that rotation of said cylinder so as to unwrap said lift cord from said cylinder causes said lift cord, while unwrapping, to bear against said guiding surface to cause said cylinder to move in a second, opposite lateral direction.

2. A lifting mechanism in accordance with claim 1 further including clip means, slideably attached to said cylinder, for securing said lift cord to said cylinder.

25 3. A lifting mechanism in accordance with claim 1 wherein said camming surface is on said bracket means.

4. A lifting mechanism in accordance with claim 1 wherein said guiding surface is on said bracket means.

5. A lifting mechanism in accordance with claim 1 wherein said camming surface and said guiding surface are both on said bracket means.

30 6. A lifting mechanism in accordance with claim 1 wherein said camming surface is configured such that rotation of said cylinder so as to wrap said lift cord in either direction causes said lift cord to bear against said camming surface to cause said cylinder to move in said first lateral direction.

35

- 12 -

7. A lifting mechanism in accordance with claim 6 wherein said guiding surface is configured such that unwrapping of said lift cord from said cylinder in either direction causes said lift cord to bear against said guiding surface to cause said cylinder to move in said second, opposite lateral direction.

8. A lifting mechanism comprising a cylinder; bracket means to support said cylinder; rotation means; said cylinder being slideably connected to said rotation means to allow torque to be transmitted between said rotation means and said cylinder while still permitting lateral movement of said cylinder relative to said rotation means; two or more camming surfaces; one lift cord attached to said cylinder in relation to each of said camming surfaces such that rotation of said cylinder so as to wrap said lift cords around said cylinder causes each of said lift cords to bear against its respective camming surface to cause said cylinder to move in a first lateral direction; and two or more guiding surfaces so disposed in relation to said lift cords that rotation of said cylinder so as to unwrap said lift cords from said cylinder causes each of said lift cords, while unwrapping, to bear against a respective guiding surface to cause said cylinder to move in a second, opposite lateral direction.

9. A lifting mechanism in accordance with claim 8 further including a clip means for each of said lift cords, slideably attached to said cylinder, for securing said lift cords to said cylinder.

10. A lifting mechanism in accordance with claim 8 wherein said camming surfaces are on said bracket means.

11. A lifting mechanism in accordance with claim 8 wherein said guiding surfaces are on said bracket means.

12. A lifting mechanism in accordance with claim 8 wherein said camming surfaces and said guiding surfaces are both on said bracket means.

- 13 -

13. A lifting mechanism in accordance with claim 8 wherein said camming surfaces are configured such that rotation of said cylinder so as to wrap said lift cords in either direction causes said lift cords to bear against said camming surfaces to cause said cylinder to move in said first lateral direction.

14. A lifting mechanism in accordance with claim 13 wherein said guiding surfaces are configured such that unwrapping of said lift cords from said cylinder in either direction causes said lift cords to bear against said guiding surfaces to cause said cylinder to move in said second, opposite lateral direction.

15. A pulling mechanism comprising a cylinder; bracket means to support said cylinder; rotation means; said cylinder being slideably connected to said rotation means to allow torque to be transmitted between said rotation means and said cylinder while still permitting translational movement of said cylinder relative to said rotation means; a camming surface; a cord attached to said cylinder in relation to said camming surface such that rotation of said cylinder so as to wrap said cord around said cylinder causes said cord to bear against said camming surface to cause said cylinder to move in a first translational direction; and a guiding surface disposed so that rotation of said cylinder so as to unwrap said cord from said cylinder causes said cord, while unwrapping, to bear against said guiding surface to cause said cylinder to move in a second, opposite translational direction.

16. A pulling mechanism in accordance with claim 15 wherein said camming surface is configured such that rotation of said cylinder so as to wrap said cord in either direction causes said cord to bear against said camming surface to cause said cylinder to move in said first translational direction.

- 14 -


17. A pulling mechanism in accordance with claim 16
wherein said guiding surface is configured such that unwrap-
5 ping of said cord from said cylinder in either direction
causes said cord to bear against said guiding surface to
cause said cylinder to move in said second, opposite trans-
lational direction.

18. A pulling mechanism in accordance with claim 15
10 wherein said guiding surface is configured such that unwrap-
ping of said cord from said cylinder in either direction
causes said cord to bear against said guiding surface to
cause said cylinder to move in said second, opposite trans-
lational direction.

15

1/5

FIG. 1

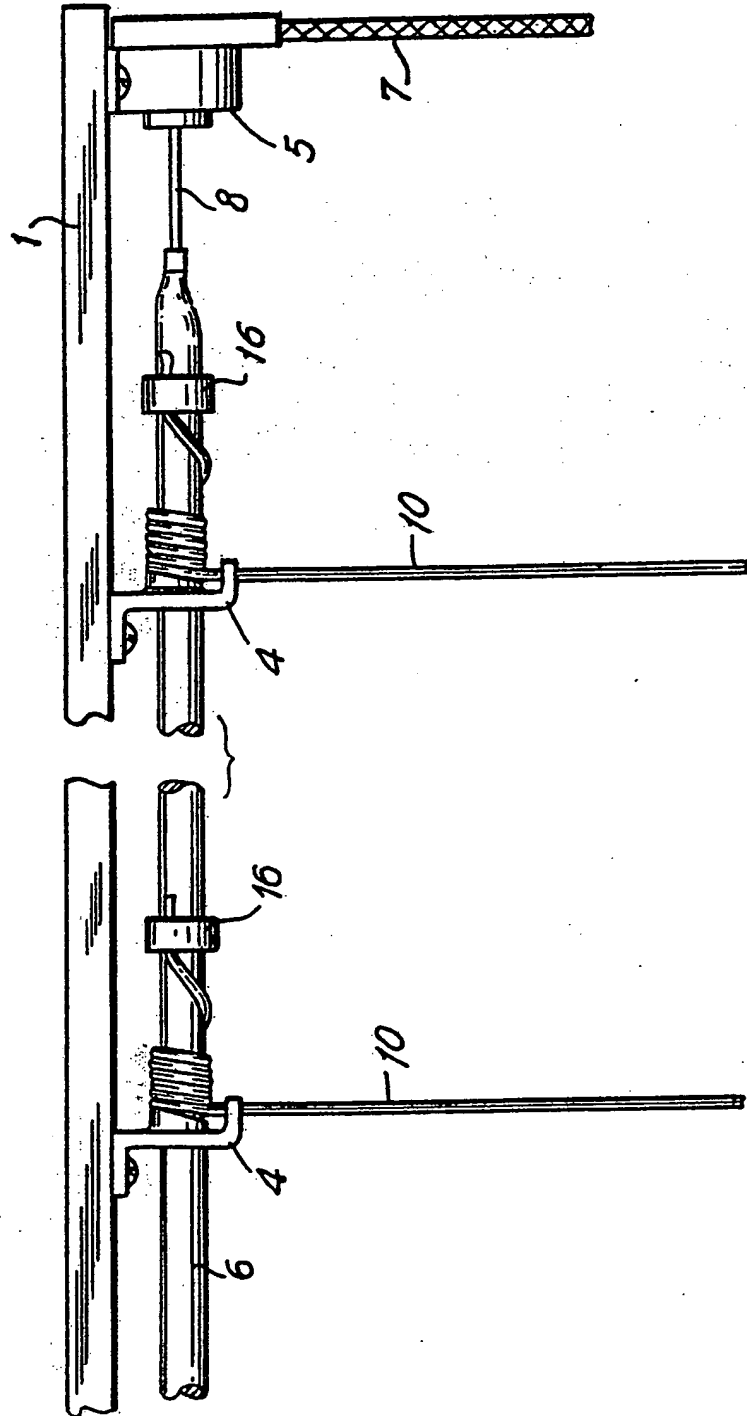

SUBSTITUTE SHEET



2 / 5

FIG. 3


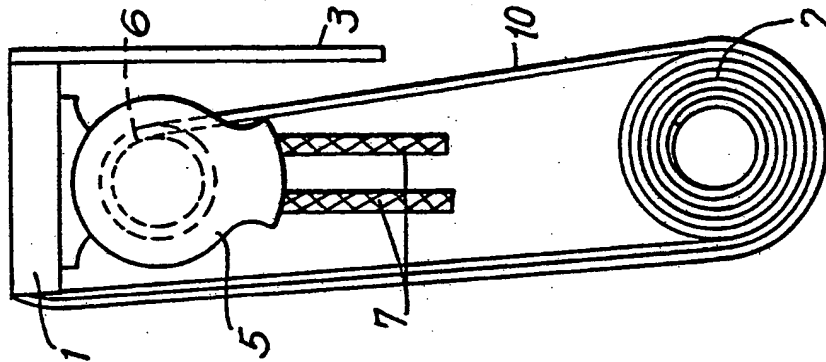


FIG. 2



SUBSTITUTE SHEET

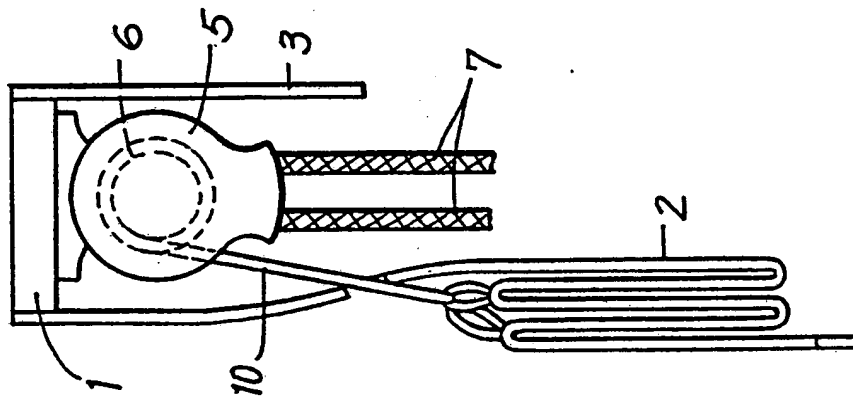

3/5

FIG. 4

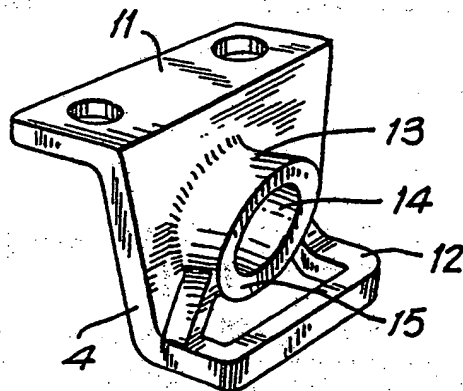


FIG. 5


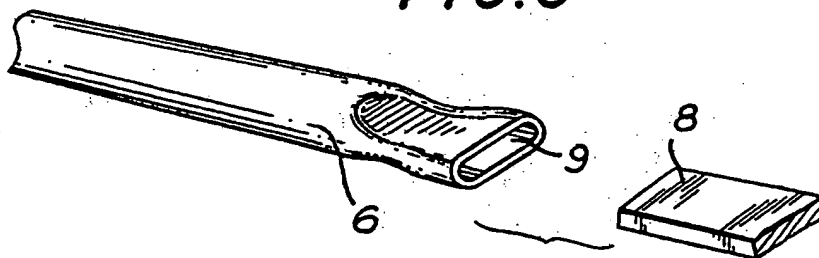


FIG. 6



SUBSTITUTE SHEET



4/5

FIG. 7A

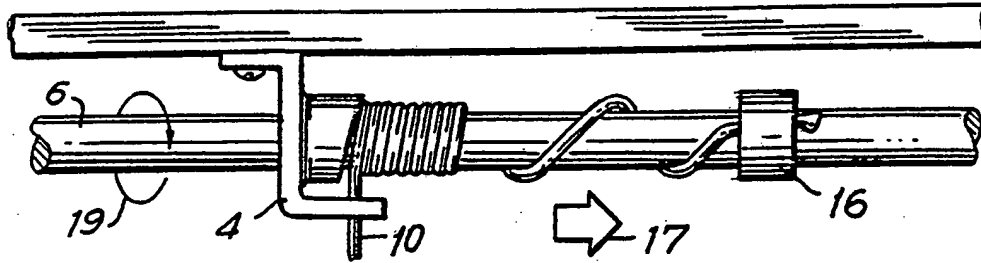


FIG. 7B

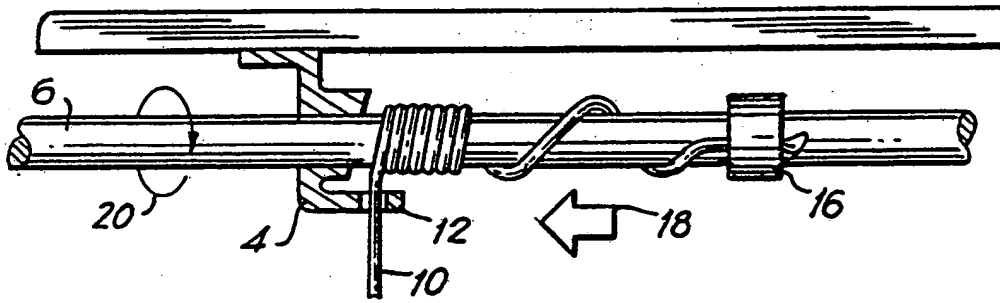


FIG. 7C


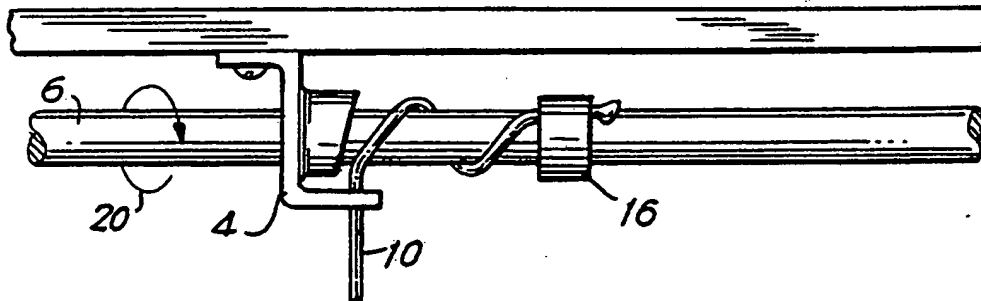






FIG. 7D



SUBSTITUTE SHEET

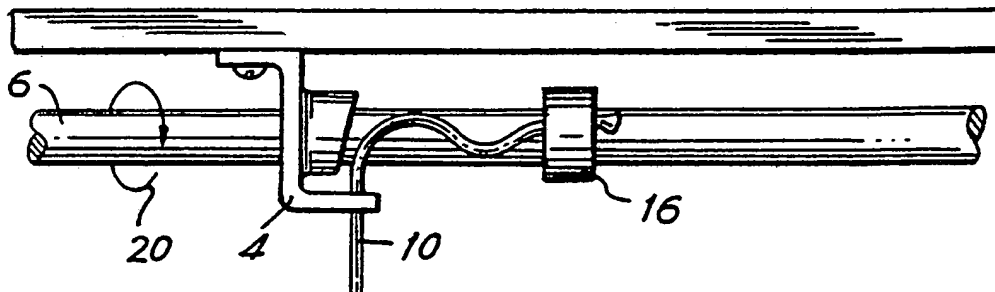

5/5

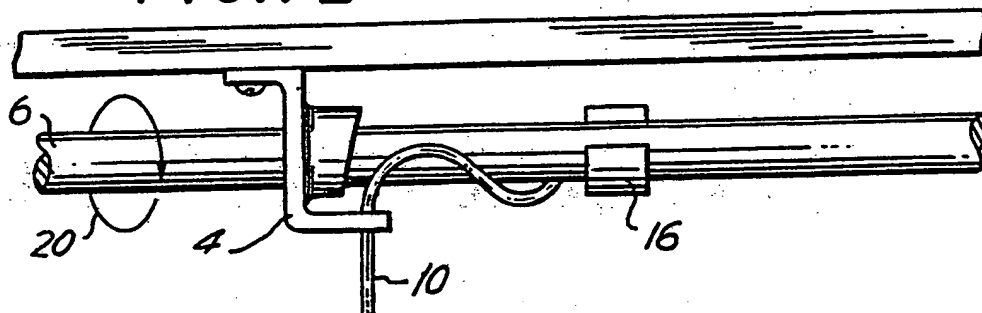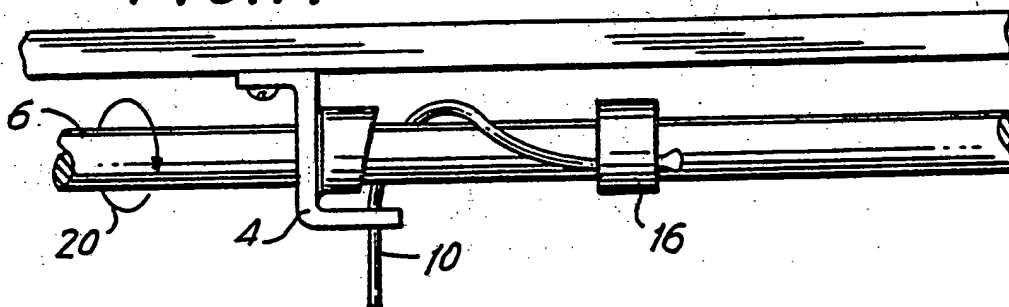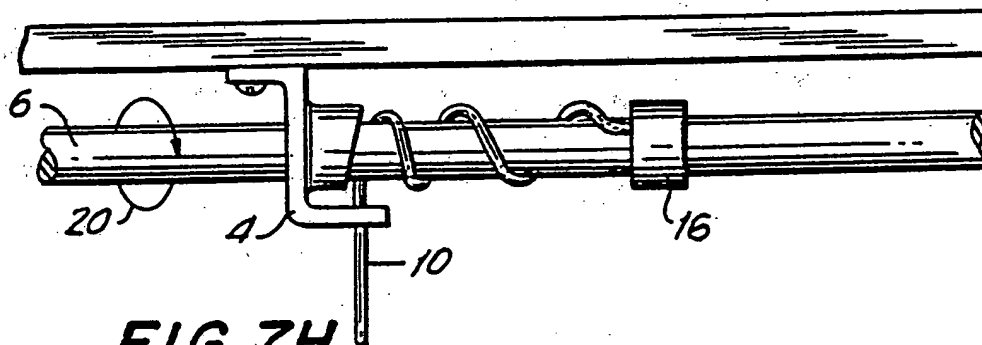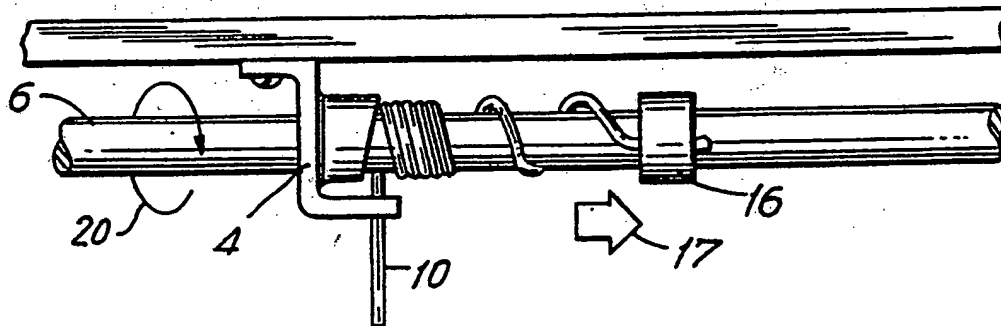FIG. 7E**FIG. 7F****FIG. 7G****FIG. 7H**

SUBSTITUTE SHEET



INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 84/02063

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ³ According to International Patent Classification (IPC) or to both National Classification and IPC Int. Cl. A47G 5/02; A47H 3/00 U.S. Cl. 160/243; 160/184R																																			
II. FIELDS SEARCHED <div style="text-align: center;">Minimum Documentation Searched ⁴</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 20%; border: none;">Classification System</td> <td style="border: none;">Classification Symbols</td> </tr> <tr> <td style="border: none; vertical-align: top;"> U.S. </td> <td style="border: none; vertical-align: top;"> 160/84R 160/171 160/243 </td> </tr> </table> <div style="text-align: center; padding-top: 10px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵</div>			Classification System	Classification Symbols	U.S. 	160/84R 160/171 160/243																													
Classification System	Classification Symbols																																		
U.S. 	160/84R 160/171 160/243																																		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴ <table style="width: 100%; border: none;"> <tr> <th style="width: 10%; border: none;">Category ⁶</th> <th style="width: 70%; border: none;">Citation of Document, ¹⁵ with indication, where appropriate, of the relevant passages ¹⁷</th> <th style="width: 20%; border: none;">Relevant to Claim No. ¹⁸</th> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 1,068,306 (Boughton) 22 July</td> <td style="border: none; text-align: center;">1-18</td> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 1,342,527 (Cahill) 08 June 1920</td> <td style="border: none; text-align: center;">1-18</td> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 1,848,742 (Oulsman et al) 08 March 1932</td> <td style="border: none; text-align: center;">1-18</td> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 1,894,833 (Ruby et al) 17 January 1933</td> <td style="border: none; text-align: center;">1-18</td> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 2,250,106 (Lorentzen) 22 July 1941</td> <td style="border: none; text-align: center;">1-18</td> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 2,520,629 (Esposito) 29 August 1950</td> <td style="border: none; text-align: center;">1-18</td> </tr> <tr> <td style="border: none; text-align: center;">A</td> <td style="border: none;">US, A, 3,246,685 (Anderson et al) 19 April 1966</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none; text-align: center;">Y</td> <td style="border: none;">US, A, 3,352,349 (Hennequin) 14 November 1967</td> <td style="border: none; text-align: center;">2,9</td> </tr> <tr> <td style="border: none; text-align: center;">A</td> <td style="border: none;">US, A, 3,487,875 (Shukat et al) 06 January 1970</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none; text-align: center;">X</td> <td style="border: none;">GB, A, 986,529 (Douglas) 17 March 1965</td> <td style="border: none; text-align: center;">1,3-8,10-18</td> </tr> </table>			Category ⁶	Citation of Document, ¹⁵ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸	Y	US, A, 1,068,306 (Boughton) 22 July	1-18	Y	US, A, 1,342,527 (Cahill) 08 June 1920	1-18	Y	US, A, 1,848,742 (Oulsman et al) 08 March 1932	1-18	Y	US, A, 1,894,833 (Ruby et al) 17 January 1933	1-18	Y	US, A, 2,250,106 (Lorentzen) 22 July 1941	1-18	Y	US, A, 2,520,629 (Esposito) 29 August 1950	1-18	A	US, A, 3,246,685 (Anderson et al) 19 April 1966		Y	US, A, 3,352,349 (Hennequin) 14 November 1967	2,9	A	US, A, 3,487,875 (Shukat et al) 06 January 1970		X	GB, A, 986,529 (Douglas) 17 March 1965	1,3-8,10-18
Category ⁶	Citation of Document, ¹⁵ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸																																	
Y	US, A, 1,068,306 (Boughton) 22 July	1-18																																	
Y	US, A, 1,342,527 (Cahill) 08 June 1920	1-18																																	
Y	US, A, 1,848,742 (Oulsman et al) 08 March 1932	1-18																																	
Y	US, A, 1,894,833 (Ruby et al) 17 January 1933	1-18																																	
Y	US, A, 2,250,106 (Lorentzen) 22 July 1941	1-18																																	
Y	US, A, 2,520,629 (Esposito) 29 August 1950	1-18																																	
A	US, A, 3,246,685 (Anderson et al) 19 April 1966																																		
Y	US, A, 3,352,349 (Hennequin) 14 November 1967	2,9																																	
A	US, A, 3,487,875 (Shukat et al) 06 January 1970																																		
X	GB, A, 986,529 (Douglas) 17 March 1965	1,3-8,10-18																																	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁶ Special categories of cited documents: ¹⁸</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 50%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>																																			
IV. CERTIFICATION <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> Date of the Actual Completion of the International Search ² 29 January 1985 </td> <td style="width: 50%; border: none; vertical-align: top;"> Date of Mailing of this International Search Report ² <div style="font-size: 1.2em; font-weight: bold;">05 FEB 1985</div> </td> </tr> <tr> <td style="border: none; vertical-align: top;"> International Searching Authority ¹ ISA/US </td> <td style="border: none; vertical-align: top;"> Signature of Authorized Officer ¹⁰ Peter M. Caun </td> </tr> </table>			Date of the Actual Completion of the International Search ² 29 January 1985	Date of Mailing of this International Search Report ² <div style="font-size: 1.2em; font-weight: bold;">05 FEB 1985</div>	International Searching Authority ¹ ISA/US	Signature of Authorized Officer ¹⁰ Peter M. Caun																													
Date of the Actual Completion of the International Search ² 29 January 1985	Date of Mailing of this International Search Report ² <div style="font-size: 1.2em; font-weight: bold;">05 FEB 1985</div>																																		
International Searching Authority ¹ ISA/US	Signature of Authorized Officer ¹⁰ Peter M. Caun																																		